

Start Your Living up!



Automation Solution



Convenience • Caring • Comfort

- Light Control
- Door / Window Status Indicator
- Power Curtain Control
- Gate Opener
- Accessories
- Gateway




Start Your Living up!



www.livinup.com.tw www.lgreen.com.tw www.tgmetek.com Catalog

Factory
G-LIGHT TECHNOLOGIES CO.,LTD.
NO.56, Kai-An 3rd St., Tainan City 70945, Taiwan
+ (886) 6-357-0037 + (886) 6-357-0036
jessica@lighttech.com

Taipei office
TGM TECHNOLOGIES CO.,LTD.
20F-10, NO.97, Sec.1, Xintai 5th Rd., Xizhi Dist.,
New Taipei City 221, Taiwan
+ (886) 2-2697-6606
service@tgmetek.com

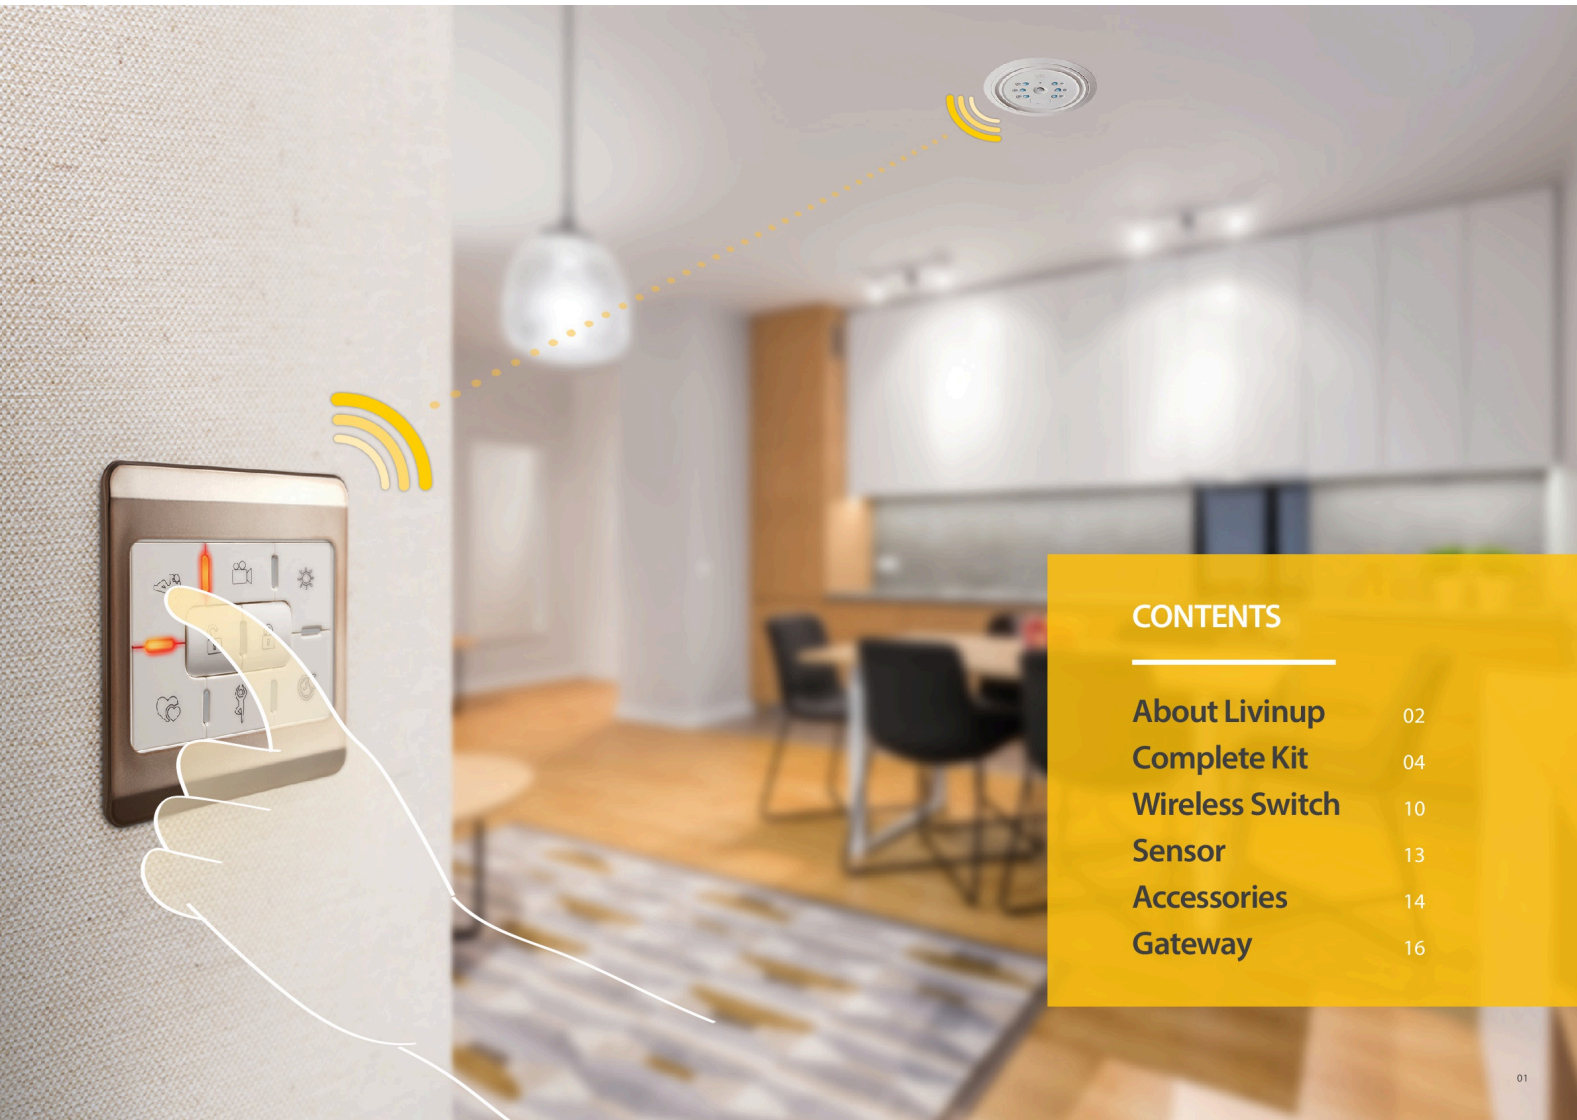

CONTENTS

About Livinup	02
Complete Kit	04
Wireless Switch	10
Sensor	13
Accessories	14
Gateway	16

Wireless Light Control Premium Set

LU-CK-005-01

Features

3 Channel of light control.
Easy to click into the ceiling.
Optional for any wireless door sensor, daylight sensor and motion sensor.

Description

3 channel control module x 1
Wireless 3 gang light switch with master OFF x 2

Spec.

Control Module :

90V-250VAC, 50 / 60Hz
Maximum load : 300W / 110V, 600W / 220V per channel

Wireless Devices :

3V, CR2032 coin batteries
433.92Mhz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation

CE, EMC, FCC and RCM approved



Wireless Light Control

LU-CK-004-01

Features

3 channel of light control.
Suitable specific areas. Installation 3 channel at once.
Optional for any wireless door sensor, daylight sensor and motion sensor.

Description

3 channel control module x 1
Wireless 3 gang light switch with master OFF x 2

Spec.

Control Module :

90V-250VAC, 50 / 60Hz
Maximum load : 300W / 110V, 600W / 220V per channel

Wireless Devices :

3V, CR2032 coin batteries
433.92Mhz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation

CE, EMC, FCC and RCM approved



Home Automation System DIY Set

LU-CK-008-01

Features

AC plug-in for easy installation.
Battery backup.
Emergency flashlight when disconnect power.
Night light.
Door bell, call help and panic.
Door sensor status indicator.

Description

DIY control module x 1
Wireless door bell x 1
Wireless door sensor x 1
Wireless wrist remote x 1

Spec.

Control Module :

90V-250VAC, 50 / 60Hz

Wireless Devices :

3V, CR2032 coin batteries
433.92Mhz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation.

CE, EMC, FCC and RCM approved



Wireless Light Control Quick Set

LU-CK-001-01

Features

1 channel of light control.
Easy to start and install.
Optional for any wireless door sensor, daylight sensor and motion sensor.

Description

1 channel control module x 1
Wireless 1 gang light switch (piano type) x 1

Spec.

Control Module :

90V-250VAC, 50 / 60Hz
Maximum load : 500W / 110V, 1000W / 220V

Wireless Devices :

3V, CR2032 coin batteries
433.92Mhz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation

CE, EMC, FCC and RCM approved



Wireless Dimmable Light Control (0-10V) Quick Set

LU-CK-003-01

Features

Easy to adapt to 0-10V of dimmable LED lights. Dimming up and down with button press. Smart memorized last dim level.

Description

1 channel dimmable control module x 1
Wireless dimmable light switch x 1

Spec.

Control Module :
AC input : 90V-250VAC, 50 / 60Hz
Dimm output: 0-10VDC

Wireless Devices :
3V, CR2032 coin batteries
433.92Mhz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE, EMC, FCC and RCM approved



Wireless Dimmable Light Control (triac) Quick Set

LU-CK-002-01

Features

Universal to suit any dimmable lights. Easy to start and install. Dimming up and down with button press. Smart memorized last dim level.

Description

1 channel dimmable control module x 1
Wireless dimmable light switch x 1

Spec.

Control Module :
90V-250VAC, 50 / 60Hz
Maximum load: 150W / 110V, 300W / 220V

Wireless Devices :
3V, CR2032 coin batteries
433.92Mhz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE, EMC, FCC and RCM approved



Wireless Garage Door Opener

LU-CK-009-01

Features

Wireless Garage Door Opener
Universal compatible with rolling type
3 button switch for Up, Down, Stop Control.

Description

3 relay control module x1
Wireless 3 button switch x1

Spec.

Control Module :
90V-250VAC, 50 / 60Hz
Maximum load: 300W / 110V,
600W / 220V per channel

Wireless Devices :
3V, CR2032 coin batteries
433.92Mhz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE, EMC, FCC and RCM approved



Door / Window Status Indicator

LU-CK-010-01

Features

Sleek design compatible with existing security control modules.
Allowing the capability to monitor each door / window's status

Spec.

Control Module :
12VDC
4 dry contacts.

Wireless Devices :
3V, CR2032 coin batteries
433.92Mhz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE, EMC, FCC and RCM approved



Wireless Curtain Control

LU-CK-011-01

Features

Wireless Curtains
Universal compatible with curtain motor control output.
3 button switch for Up, Down, Stop Controlling.

Description

Receiver module x1
Wireless 3 button switch x1

Spec.

Control Module :
12VDC
8 output.

Wireless Devices :
3V, CR2032 coin batteries
433.92Mhz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE, EMC, FCC and RCM approved





Wireless Switch


- Wireless switches are designed to solve existing cable installation problems and reduce cost.
- Multiple combination for setting up different light mode or group control.
- The master OFF function gives you the ability to turn all the lights OFF at single press of a button.
- Available in different style to suit individual customer requirements.
- The wireless switch enables you to place a light switch where ever you require.
- Low current consumption.
- Precise transmission.

Classic Style

- RL-TX-E01-01** **RL-TX-E04-01**
- RL-TX-E02-01** **RL-TX-E05-01**
- RL-TX-E03-01** **RL-TX-E06-01**

Description
1 gang ~ 6 gang
Available for Master On / Off

Spec.
3V, CR2032 coin batteries
433.92MHz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE,EMC, FCC and RCM approved



Stylish Style

- RL-TX-H01-01** **RL-TX-H05-01**
- RL-TX-H02-01** **RL-TX-H06-01**
- RL-TX-H03-01** **RL-TX-H07-01**
- RL-TX-H04-01** **RL-TX-H08-01**

Description
1 gang ~ 8 gang
Available for Master On / Off

Spec.
3V, CR2032 coin batteries
433.92MHz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE,EMC, FCC and RCM approved



Piano Style

- RL-TX-G01-01** **RL-TX-G03-01**
- RL-TX-G02-01**

Description
1 gang ~ 3 gang

Spec.
3V, CR2032 coin batteries
433.92MHz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE,EMC, FCC and RCM approved



Accessories

- We also have various bridge/interface to support PC, smartphone, cloud applications.
- Free APP download for smart phone operation.
- Smart capability for different wireless devices enabling you to upgrade your automation system.

Repeater

GW-RP-001-01

Description

Can be used as a repeater to extend or replace the wireless signal.

Spec.

Included optional switching power cable adaptor.



Wireless Door Bell

GW-DB-001-01

Description

Can be used as a wireless door bell to alert the user when the door bell is long being pressed.

Spec.

PL-CR-3022 coin battery
433.92MHz
80 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE, EMC, FCC and RCM approved



Wireless call help / panic switch

GL-PN-002-01

Description

Call to help in emergency you need. Compatible home automation system.

Spec.

PL-CR-3022 coin battery
433.92MHz
80 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE, EMC, FCC and RCM approved



Wireless wrist call help / panic remote

GL-PN-001-01

Description

Elderly people can wear the wrist remote to call for help in case emergency.

Spec.

PL-CR-3022 coin battery
433.92MHz
80 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE, EMC, FCC and RCM approved



Wireless 2 button switch with master ON / OFF

Description

For customer's utilization like turn on / off motor compressor. Giving master ON/OFF command for machines.

Spec.

PL-CR-3022 coin battery
433.92MHz
80 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE, EMC, FCC and RCM approved



Wireless Remote Control

GL-TX-A01-01

Description

4 button of remote control. Available for different combination to suit customer requirements. Can be compatible with light control, gate control or any device.

Spec.

PL-CR-3022 coin battery
433.92MHz
80 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE, EMC, FCC and RCM approved



AC / DC power adaptor

GL-PW-001-01

Description

For DC wireless power adaptor. Suitable all wireless switch. Easy to adapt mechanical wireless switch.

Spec.

100VAC-250VAC input
500mA output





Mounting Plate

RL-MT-C01-01

Description
European size and color printing
86x60mm



Mounting Plate

RL-MT-B01-01

Description
European size mounting plate
86x60mm



Mounting Plate

RL-MT-A01-01

Description
US size mounting plate
117x77mm

Sensor

- Wireless sensor is stable and its slim design can easily be mounted anywhere.
- It solves the wire / pipe exposure problem of traditional wired devices.
- Giving full flexibility and allowing the ability to automatically turn lights in different scenes.

Wireless Daylight Sensor

RL-LS-C01-01

Description
Automatically turns on the lights for a preset period when dusk is detected.

Spec.
DC CR-123A battery
40/50/60mA
60 meters depends on atmospheric conditions
1 year of battery life under normal operation
CE, EMC, FCC and RoHS approved



Wireless Motion Sensor (DC version)

RL-PR-C01-01

Description
Automatically turns on the lights for a preset period when movement is detected.

Spec.
DC CR-123A battery
40/50/60mA
60 meters depends on atmospheric conditions
1 year of battery life under normal operation
CE, EMC, FCC and RoHS approved



Wireless Door / Window Sensor

SQ-DS-C01-01

Description
Very slim SQDS which about is opened, it sends the signal to receiver module to turn on lights automatically on trigger the event.

Spec.
DC CR-123A battery
40/50/60mA
60 meters depends on atmospheric conditions
1 year of battery life under normal operation
CE, EMC, FCC and RoHS approved



Wireless Motion Sensor (AC version)

RL-PR-D01-01

Description
Automatically turns on the lights for a preset period when movement is detected.

Spec.
60V (200VAC, 50 / 60Hz)
40/50/60mA
60 meters depends on atmospheric conditions
CE, EMC, FCC and RoHS approved

